

Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Wall pocket solution.

Product highlights



Flexibility

Ceiling-integrated or surface-mounted pocket solutions possible



Productivity

Door can be installed in pocket after construction is complete

Technical specifications



Max. 100 kg (220 lbs.)



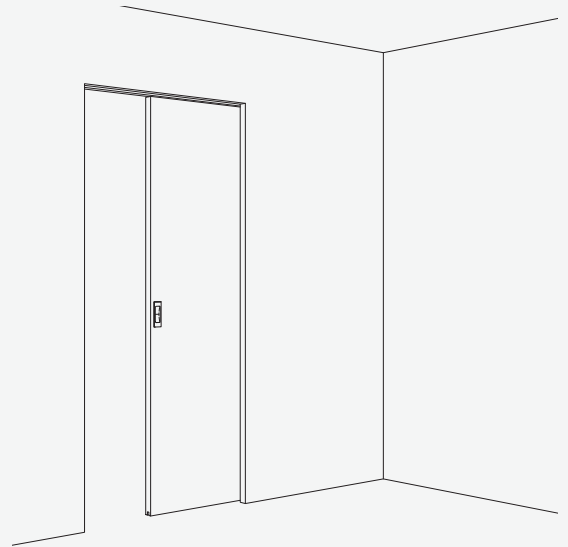
Max. 2700 mm (8'10 5/16")





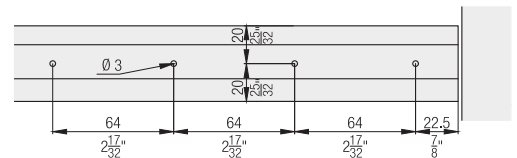


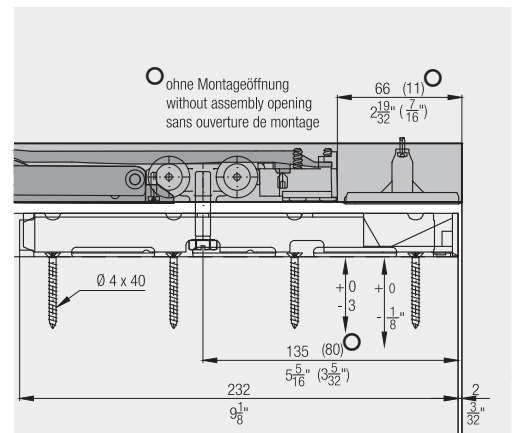
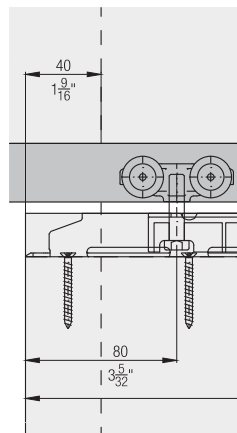
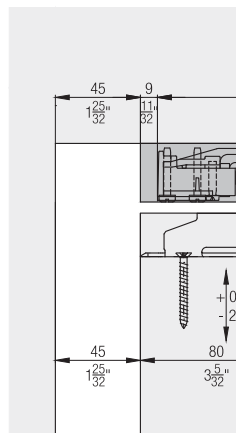
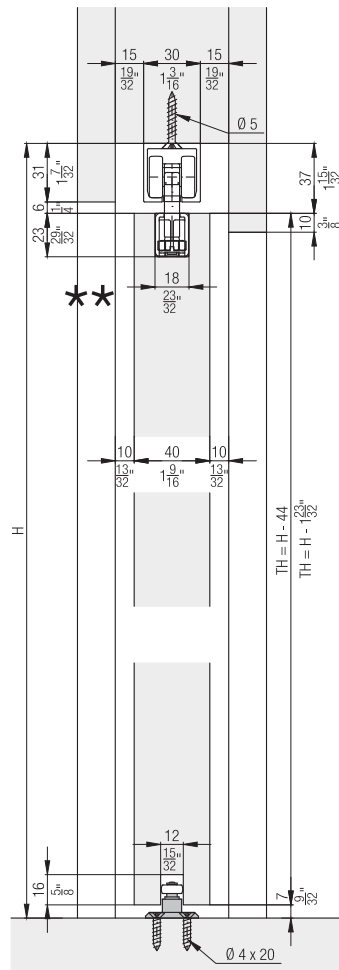
Max. 1600 mm (5'3")



30–80 mm (1 3/16" to 3 5/32")



Installation examples




**

Für das Ein- und Ausschwenken darf eine Blende bis max. Unterkante der Schiene reichen.

At least one of the panels must end at the lower edge the running track in order to be able to swivel the door inwards and outwards.

Pour que le pivotement puisse s'effectuer, un cache pourra au maximum atteindre le bord inférieur du rail.

**Set for ceiling mounting,
for 1 wooden door up to 100 kg (220 lbs.)**






		No.	
Hawa Porta 100 HMT Pocket, minimal installation height, for 1 door		057.3133.073	
Set consisting of:		057.3133.073	No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	1	042.0165.101
	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated	1	042.0175.001
	Cover cap, plastic, grey	1	600.0000.533
	Running gear holder, plastic, anthracite	1	042.0167.001
	Running gear holder, plastic, anthracite	1	042.0174.001
	Housing, steel, zinc-plated	1	042.0166.101
	Housing, steel, zinc-plated	1	042.0166.102
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120

**Set for ceiling mounting,
for 1 wooden door up to 100 kg (220 lbs.)**






		No.	
Hawa Porta 100 HMT Pocket, with Push-to-open, with running track, 2000 mm (6' 6 3/4"), aluminum, anodized, for 1 door		057.3181.072	
Set consisting of:		mm (inch)	No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, without retention spring, plastic, gray	2	057.3073.071
	Soft close, top running, 61-100 kg (133 to 220 lbs.), plastic	1	042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	042.3105.001
	Push-to-open Hawa Porta 100, 40-100 kg, with self-closing	1	057.3177.071
	Release piece for Push-to-open, zinc die casting	1	057.3176.001
	Screw set soft close	2	600.0000.566
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	1	042.0165.101
	Head cap screw, M8x35 mm (5/16"x1 3/8"), steel, zinc-plated	1	042.0175.001
	Cover cap, plastic, grey	1	600.0000.533
	Running gear holder, plastic, anthracite	1	042.0167.001
	Running gear holder, plastic, anthracite	1	042.0174.001
	Housing, steel, zinc-plated	1	042.0166.101
	Housing, steel, zinc-plated	1	042.0166.102
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	766.5040.140

Continued table on next page

Table continued from previous page





	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1 057.3174.200
	Assembly pin, plastic, gray	9	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated	10	766.3054.140

Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16 ")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16 ")	057.3016.250
		6,000 (19' 8 7/32 ")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16 ")	057.3016.251
		6,000 (19' 8 7/32 ")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	057.3016.256
		cut to size	057.3016.998
	Running track, ceiling integration, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	27668
		3,500 (11' 5 25/32 ")	27667
		6,000 (19' 8 7/32 ")	30326
		cut to size	27669
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Assembly set





	No.
Assembly set Hawa Porta 60/100, 2000 mm (6' 6 3/4 ")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16 ")	057.3179.250

		mm (inch)	057.3179.200	057.3179.250	No.
Set consisting of:					
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1		057.3174.200
	Assembly pin, plastic, gray		9	11	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated		10	12	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")		1	057.3174.250

Soft close




For soft closing in opening and closing direction order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

		042.3102.071	042.3102.072	No.
Set consisting of:				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072



**Push-to-open with self closing mechanism
(must only be used with Hawa Porta 100)**

	No.
Push-to-open Hawa Porta 100, 40–100 kg (88–220 lbs.), 1 piece	057.3178.071

Set consisting of:		057.3178.071	No.
	Push-to-open Hawa Porta 100, 40–100 kg (88–220 lbs.), with self-closing	1	057.3177.071
	Release piece for Push-to-open, zinc die casting	1	057.3176.001
	Screw set soft close	1	600.0000.566



Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071


Set consisting of:		042.3114.071	No.
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

Screw set






	No.
Screw set for ceiling integration, +15 mm (+19/32")	057.3180.071

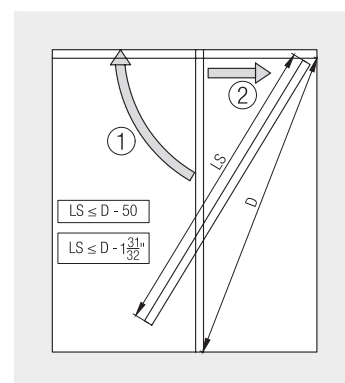
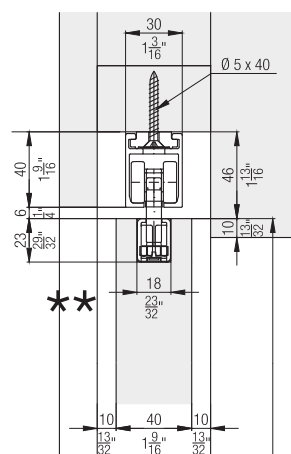


Set consisting of:		057.3180.071	No.
	Hexagon screw, M8x51 mm (5/16"x2"), steel, zinc-plated	2	042.0165.103
	Head cap screw, M8x50 mm (5/16"x1 31/32"), steel, zinc-plated	1	042.0175.002

Bottom guide set for wall mounting

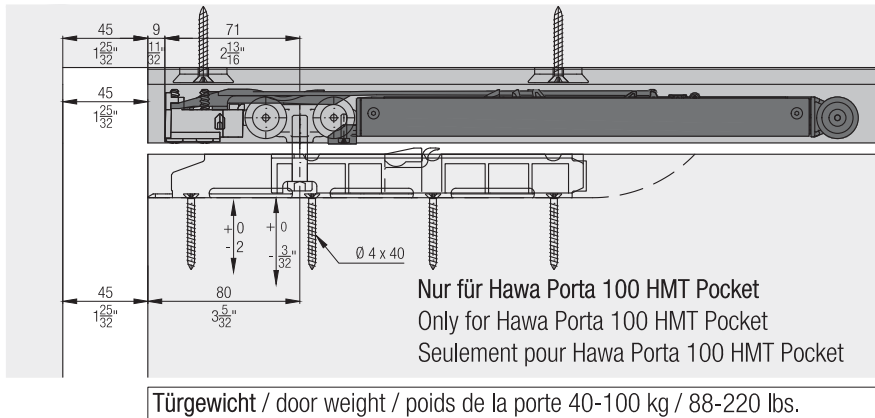
	No.
 Set bottom guide for wall mounting, with roller	057.3128.171

Accessories

	No.
 Key for dismounting, steel, zinc-plated	042.3119.101
 Spring loaded buffer Hawa Porta 60/100	27760
 Routing jig for assembly opening	042.3118.071
 Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
 Track cleaner, plastic, blue	057.3099.071

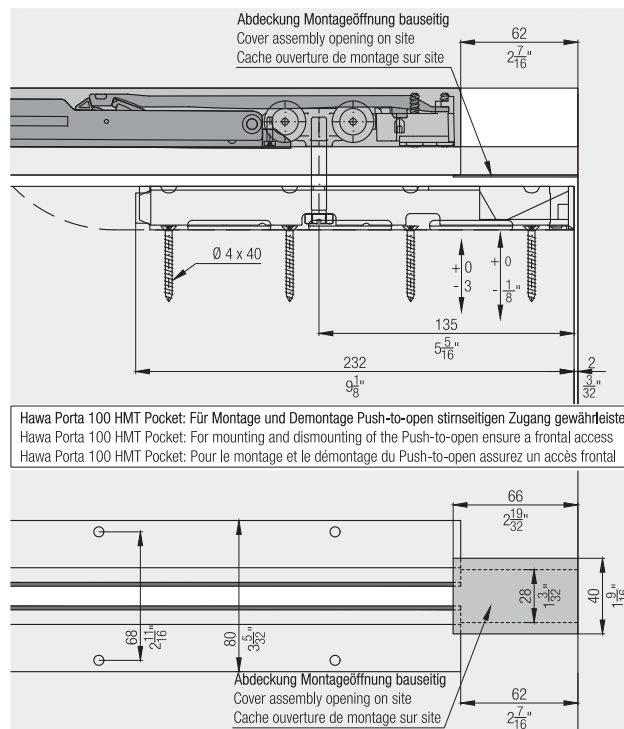
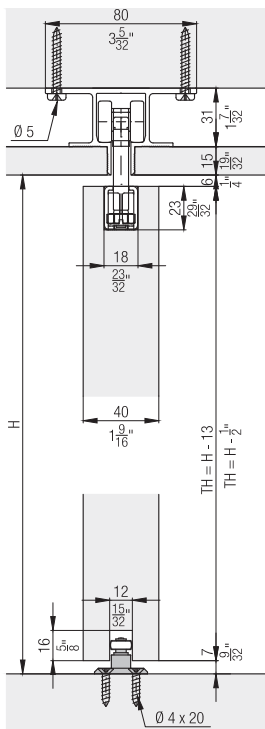
Assembly set/track installation Pocket

Wall mounting bottom guide


Push-to-open with self closing mechanism

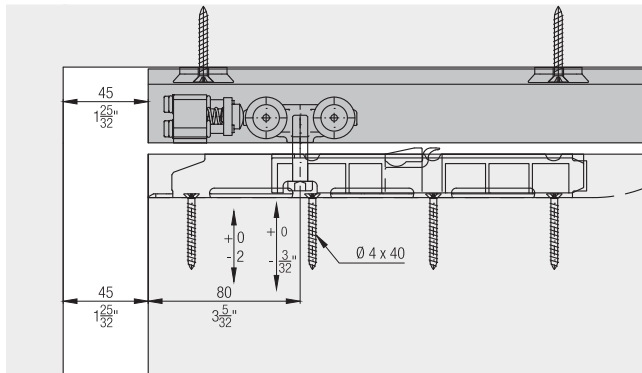


Ceiling integration

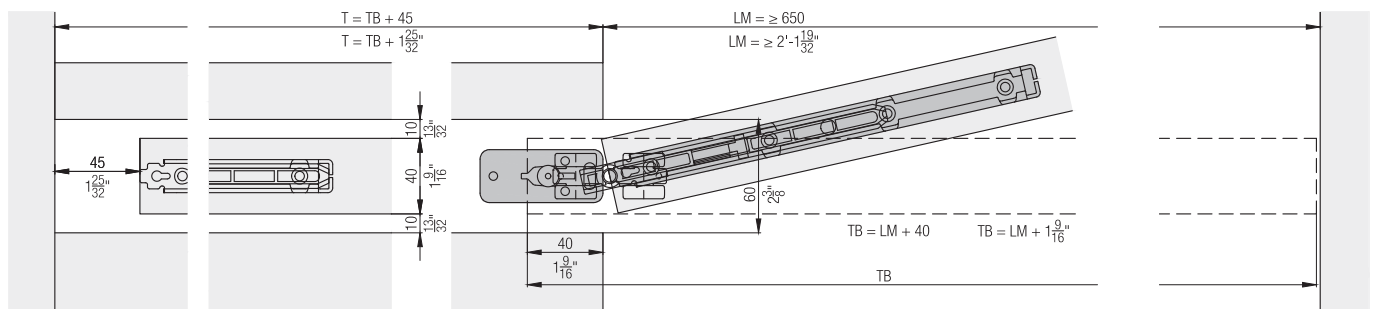
Recommendation: For systems integrated into the ceiling, provide assembly openings or front access to the system.



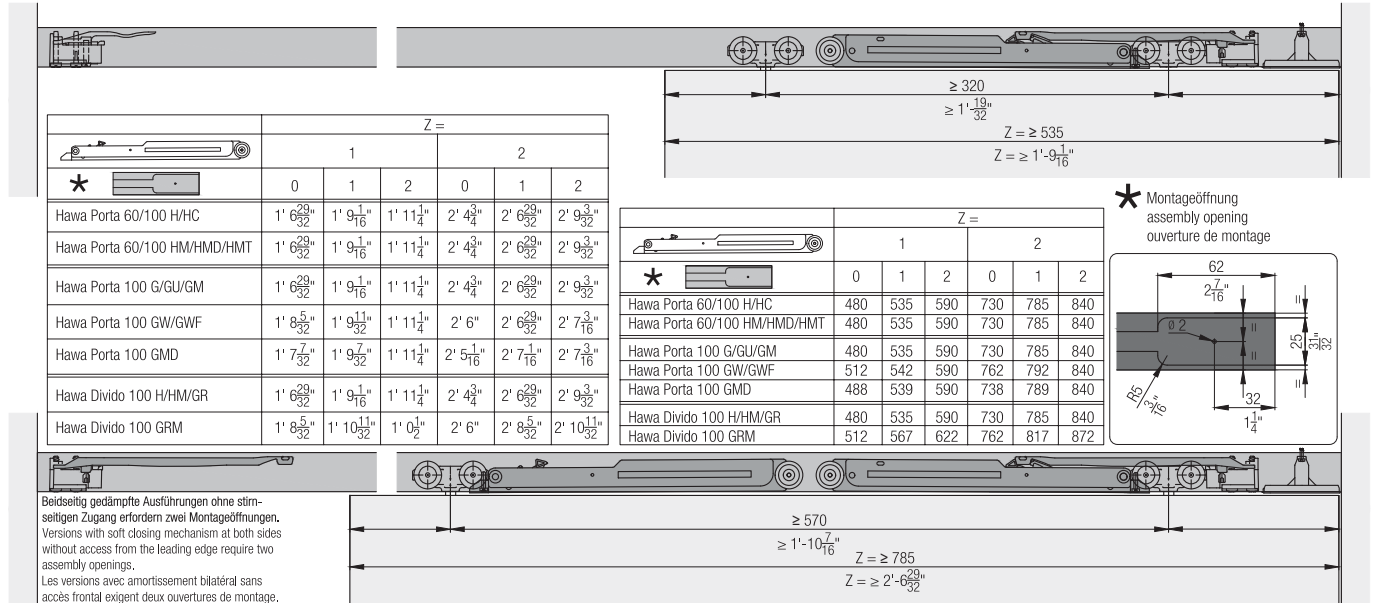
Spring stop



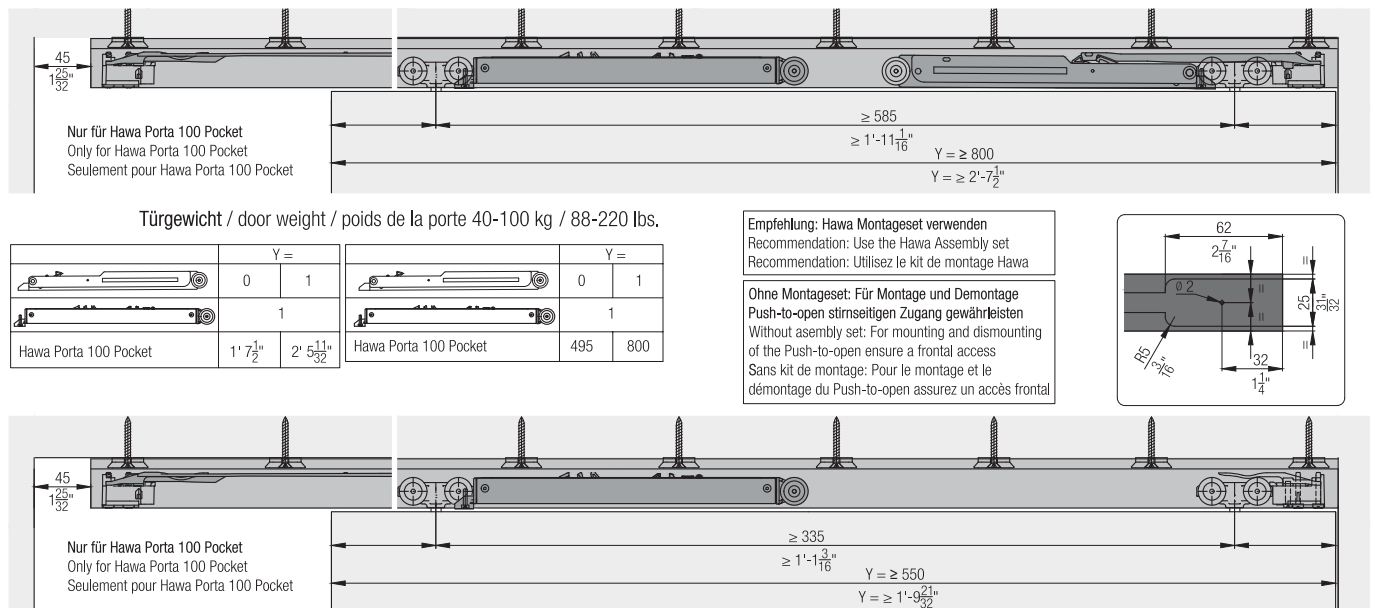
Calculations



Soft close



Push-to-open soft closing mechanism



Accessories

- Lock solutions from page 479
- General accessories from page 487

Planning/execution

Further information about the product can be found on www.hawa.com.