



Häfele Slido F-Line15 55A

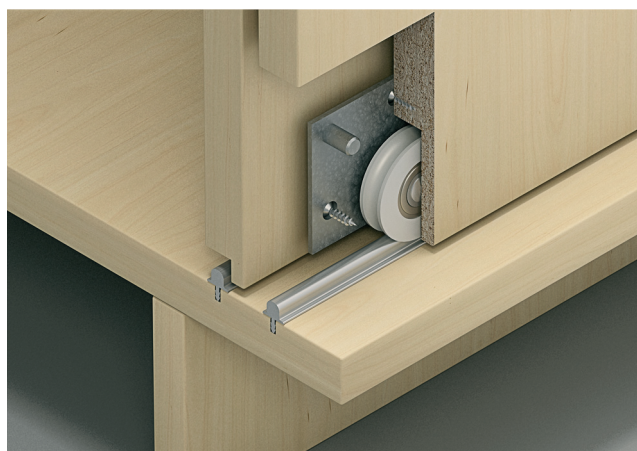


> Excellent running properties due to large roller diameters

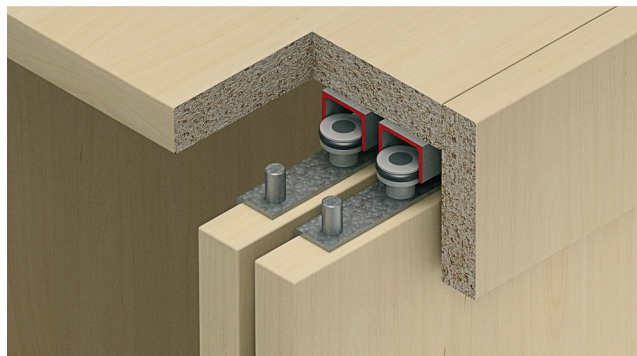


- > Door thickness: 16–19 mm
- > Running gear: Bottom running, 1 roller
- > Running gear guided by: Ball bearing mounted roller: Plastic, axle: Steel
- > Adjustment facility: Height ± 2 mm
- > Application: For 2 doors also with soft closing mechanism

Installation dimensions

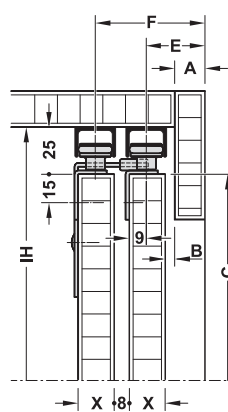


C = door height ($IH - 25 - 3$)
IH = internal cabinet height
 $B \geq 5$
 $D = G + X + 8$
 $E = A + B + X - 9$
 $F = E + X + 8$
 $G = A + B + X - 7.5$


Guide track, top

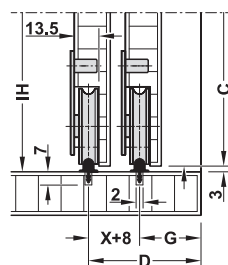

Running track for groove mounting and press fitting

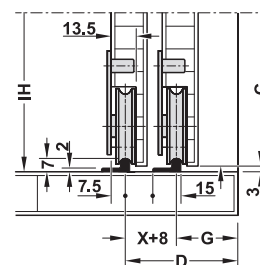

Running track for screw fixing

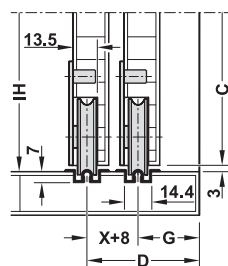

Running track for recess mounting

Note

The positions of the running gears depend on the selected running tracks. Please note the drilling patterns in the installation instructions.

→ Set





	Version	Supplied with	Cat. No.
For 2 doors	Without adjustment facility	4 running gears 2 buffers 3 anti-derailment devices (1 for rear door/2 for front door) 4 guides 1 door stopper	402.23.000
	With adjustment facility	4 running gears 2 height adjustment facilities 2 buffers 3 anti-derailment devices (1 for rear door/2 for front door) 4 guides 1 door stopper	402.23.002
	With adjustment facility and soft and self closing mechanism	4 running gears 2 height adjustment facilities 2 buffers 3 anti-derailment devices (1 for rear door/2 for front door) 4 guides 1 door stopper 2 soft closing mechanisms	402.23.004
For 3 doors	Without adjustment facility	6 running gears 3 buffers 4 anti-derailment devices (2 for rear doors/2 for front door) 6 guides 2 door stoppers	402.23.001
	With adjustment facility	6 running gears 3 height adjustment facilities 3 buffers 4 anti-derailment devices (2 for rear doors/2 for front door) 6 guides 2 door stoppers	402.23.003

Packing: 1 set

Order reference

The fixing material, running and guide tracks are not included in the set. Please order separately.

→ Tracks and accessories

		Material	Finish/colour	Length m	Cat. No.
Top guide track, single running, not pre-drilled		Aluminium	Bright	2.5	402.23.802
				3.5	402.23.803
				5.0	402.23.805
Bottom running track single running, for groove mounting and press fitting, with harpoon rib		Aluminium	Bright	2.5	402.23.602
				3.5	402.23.603
				5.0	402.23.605
Bottom running and guide track, single running, for screw fixing		Aluminium	Silver coloured anodized	2.5	402.26.622
				3.5	402.26.623
				5.0	402.26.625
Single running track, for recess mounting		Aluminium	Silver coloured anodized	2.5	403.77.925
				3.5	403.77.935
				6.0	403.77.960

Packing: 1 piece

Straightening fittings

► FF 9.122