

Häfele Slido F-Park71 16B




- > For door height: ≤ 1500 mm
- > For door thickness: 16–25 mm for Infront, 16–19 mm for Vorfront
- > For door width: ≤ 700 mm
- > Material: Guide and cable: steel, Guide roller: plastic
- > Finish/colour: Guide: black zinc plated, Cable: black plastic-coated, guide roller: white
- > Mounting: For screw fixing

Order reference

Please order door fixing set separately.

Cable tension adjustment

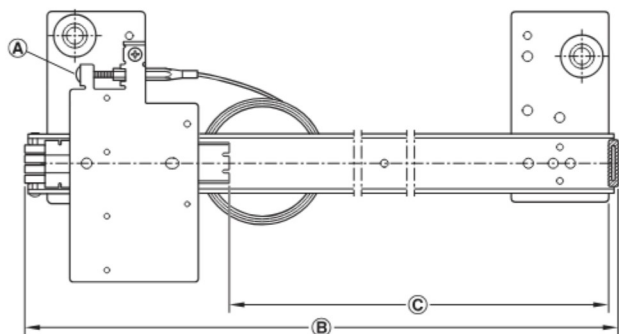

A = Cable tension adjustment screw

B = Guide length

C = Retraction distance

Door overlay calculation


Full overlay mounting:

Door overlay = door width – retraction distance

Inset mounting:



Door overlay = door width – retraction distance – door leaf thickness

Guide installation

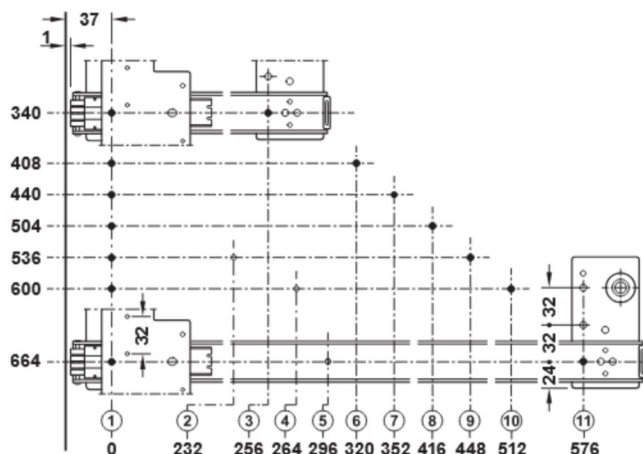

Dimensioning applies to full overlay mounting; for inset mounting, the screw positions are shifted inwards by the thickness of the door leaf.

Application

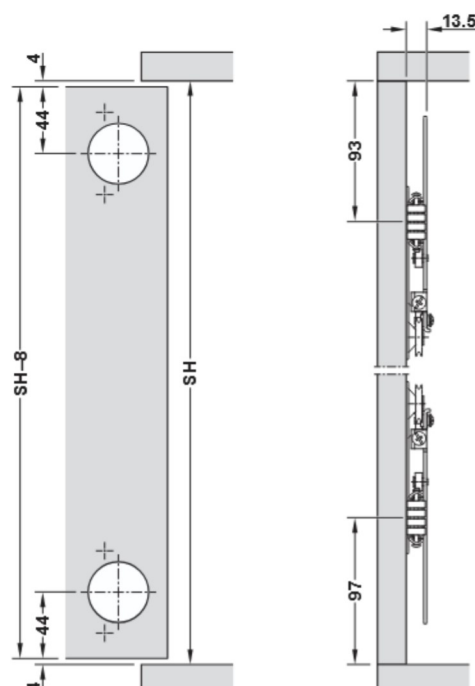

→ Set

	Supplied with	Guide length mm	Retraction distance max. mm	Cat. No.
For 1 door	2 Guides for top and bottom, incl. cables	340	230	408.25.007
	10 Fixing screws 4 x 12 mm, for guide	408	294	408.25.008
	2 Door stoppers	440	326	408.25.009
	2 Fixing screws 3.5 x 25 mm, for door stopper	504	390	408.25.010
		536	422	408.25.011
		600	486	408.25.012
		664	550	408.25.013

Order reference



Please order door fixing set separately. It is recommended to use 2 concealed hinges with soft closing mechanism up to a door height of 1500 mm.

→ Door fixing set

For inset mounting (Infront), door thickness 16–25 mm



Drilling pattern for cup fixing



A = Door thickness

- > Area of application: Häfele Slido F-Park71 16B/25B, Infront
- > Material: Steel
- > Opening angle: 95°
- > Cup drilling depth: 13 mm
- > Drilling pattern: 52/7.5
- > Mounting: Door on cabinet with quick fixing system SM
- > Cup fixing: For screw fixing

Supplied with

- 1 Concealed hinge, opening angle 95°
- 1 Cruciform mounting plate
- 2 Fixing screws M4 x 6 mm, for mounting plate
- 2 Fixing screws 3.5 x 15 mm, for hinge cup

Version	Black	Nickel plated
With soft closing mechanism	408.00.404	408.00.400
Without soft closing mechanism	408.00.405	408.00.401



Packing: 1 Set

→ Door fixing set

For full overlay mounting (Vorfront), door thickness 16–19 mm



Drilling pattern for cup fixing



- > Area of application: Häfele Slido F-Park71 16B/25B, Vorfront
- > Material: Steel
- > Opening angle: 95°
- > Cup drilling depth: 13 mm
- > Drilling pattern: 52/7.5
- > Mounting: Door on cabinet with quick fixing system SM
- > Cup fixing: For screw fixing

Supplied with

- 1 Concealed hinge, opening angle 95°
- 1 Cruciform mounting plate
- 2 Fixing screws M4 x 6 mm, for mounting plate
- 2 Fixing screws 3.5 x 15 mm, for hinge cup

Version	Black	Nickel plated
With soft closing mechanism	408.00.406	408.00.402
Without soft closing mechanism	408.00.412	408.00.403

Packing: 1 Set